



## ECClos®-S

Conveyor system closure designed as a robust damper made of sheet metal panels

### Product description

The sheet metal damper is characterised by its robust sandwich construction with sheet metal casing on all sides. It is suitable for interrupted and continuous conveyor systems such as belt, roller and suspension chain conveyors. Segmented damper elements enable smooth conveyance to the installation site. Variable fixed panels provide for easy implementation of customer-specific solutions.

<b>Type</b>	Fire protection closure as part of track-bound conveyor systems	<b>Closing cycles</b>	C5 number of closing cycles 200,000 • classified according to DIN EN 13501-2
<b>Proof of usability</b>	<a href="#">European</a> Technical Assessment - ETA (EU) • Certificate of Constancy of Performance (UK)	<b>Re-opening</b>	electromotive (standard) • manual
<b>Closing direction</b>	from left to right • from right to left • From top to bottom	<b>Conveyor system</b>	Skid conveyor • Sloping track • Interrupted conveyor system • Continuous belt conveyor system • Continuous travelling carriages • Continuous suspension chain conveyor • Continuous roller conveyor system • Continuous conveyor system
<b>Fire resistance</b>	EI 120		

## Constructive system design (Horizontal)

### Required wall quality


Masonry	$d \geq 200$ mm
Concrete	$d \geq 200$ mm
Aerated concrete	$d \geq 200$ mm
Assembly walls	$d \geq 160$ mm
panelled steel construction	acc. to DIN 4102-4

### approval range (max 13.6sqm)

LW	4500 mm
LH	4500 mm

### technical feasibility

LW	4500 mm
LH	5100 mm

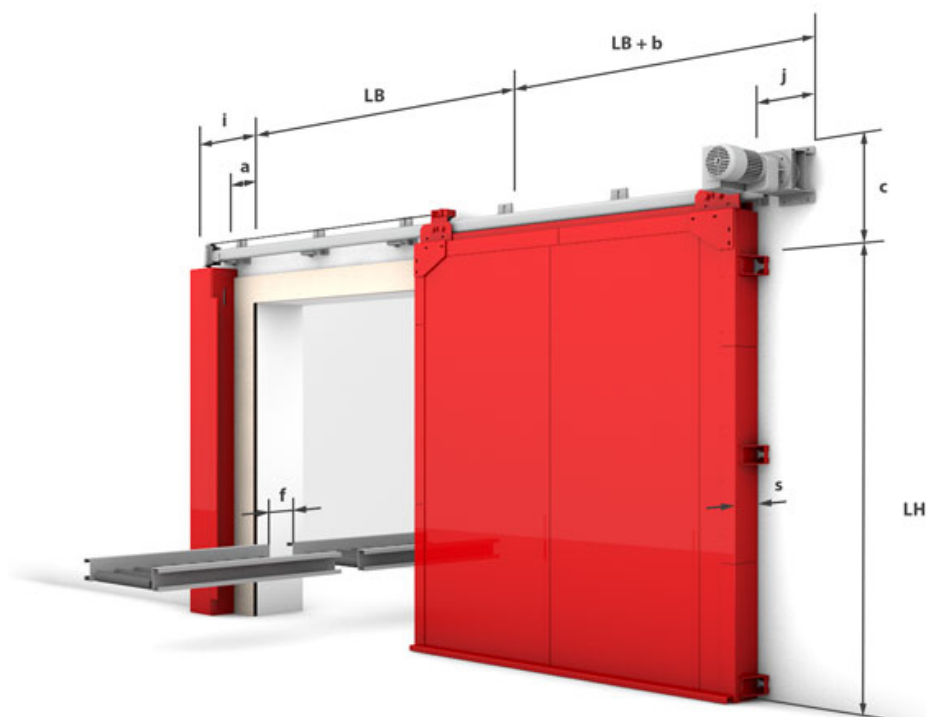

a = 187    b = 590    c = 410    f =  $\geq 164$     i = 410    j = 150    s = 122

## Constructive system design (Vertical)

### Required wall quality


Concrete	$d \geq 200 \text{ mm}$
Masonry	$d \geq 200 \text{ mm}$
aerated concrete	$d \geq 200 \text{ mm}$
assembly walls	$d \geq 160 \text{ mm}$
panelled steel construction acc. to	DIN 4102-4

### approval range (12.1 m<sup>2</sup> vertical closing direction)

LW	up to 4500 mm
LH	up to 4500 mm

### technical feasibility (max. 20.25 m<sup>2</sup>)

LW	up to 4500 mm
LH	up to 5100 mm

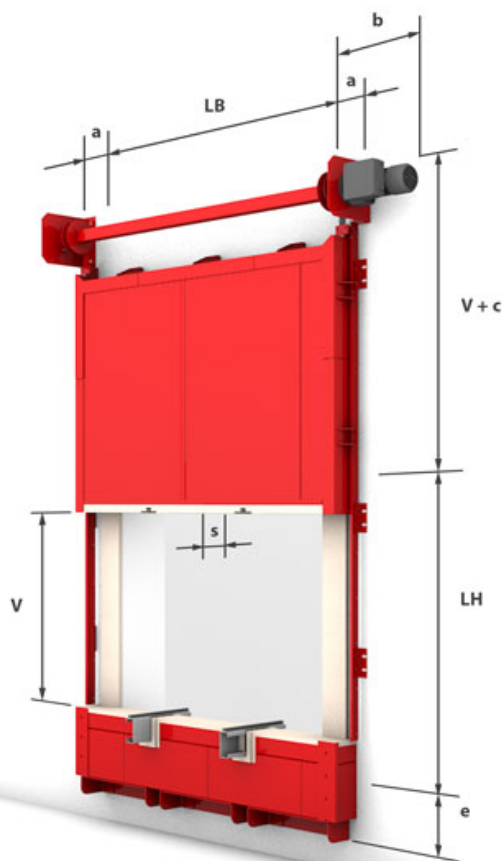

$s = 51 \text{ mm}$

$a = 245$      $b = 660$      $c = 550/625$      $e = \geq 0$      $s = 122$

[www.abcdoors.co.uk](http://www.abcdoors.co.uk)

NORTHERN DEPOT & HEAD OFFICE  
ABC Industrial Doors Limited, Wharfside Business Park,  
Irlam Wharf Rd, Irlam M44 5PN

National Help Desk t: 0808 169 5030  
e: [info@abcdoors.co.uk](mailto:info@abcdoors.co.uk)

SOUTHERN DEPOT  
ABC Industrial Doors Limited, Unit B2 Pierson Court,  
Knowl Piece, Hitchin, Hertfordshire SG4 0TY

National Help Desk t: 0808 169 5030  
e: [info@abcdoors.co.uk](mailto:info@abcdoors.co.uk)